




Product Specification

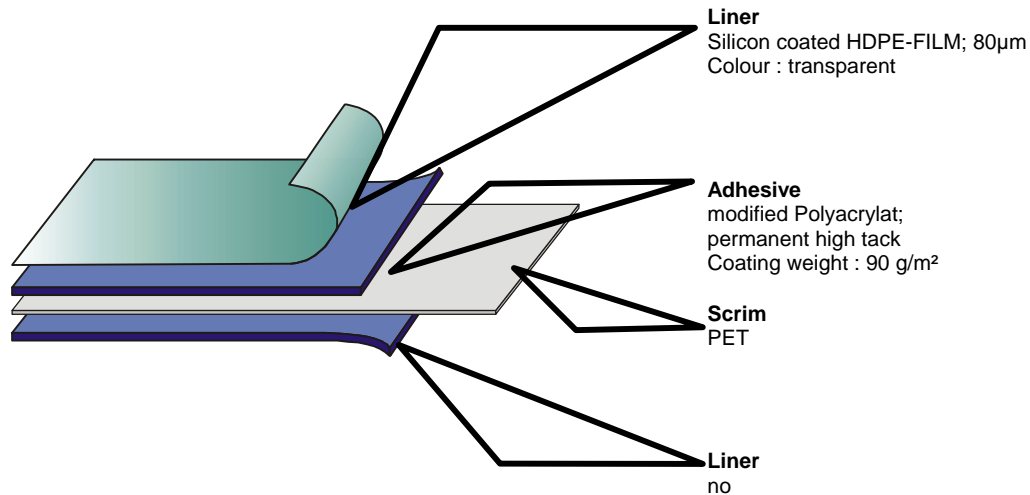

Testresults

Adhesion peel 180° (according to AFERA 4001)

Stahl	30 N/25 mm
Aluminium	30 N/25mm
Glas	30 N/25mm
PMMA	28 N/25 mm
PP	26 N/25 mm
PE	15 N/25 mm

Temperature Resistance: from - 40°C to +80

Key Characteristics

- High initial tack and excellent wetting properties.
- Good conformability and dimensional stability.

BIOLINK
Gesellschaft
für Verbindungs-
technologien mbH

Keplerweg 3
82538 Geretsried
Germany



Tel.

++49.8171.9396-0



Fax

++49.8171.9396-26

Storage

This product should be stored in ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%.

In ideal storage conditions, the shelf life for this material should be approx. 12 months from the delivery date. Within this period, no major deterioration or alteration of the products performance characteristic will occur.

The values presented in this document have been determined by standard test methods and are average values that should not be used for specification purposes. Our recommendations regarding the use of our products are based on tests considered by BIOLINK to be reliable, but the customer must conduct his own tests to determine the suitability of the product to the individuals application and requirements. BIOLINK do not accept responsibility or liability, directly or consequentially, for loss or damage caused as a result of our recommendations.